

DH-S3006-4ET-36

6-Port Unmanaged Desktop Switch with 4-Port PoE



- Easy to install, and is plug and play.
- Meets the requirements of IEEE802.3af and IEEE802.3at standards.
- Performs long-distance transmission.
- With its solid full metal design, the device has great heat dissipation and no fan.
- Wide operating temperature ranging from -10°C to $+55^{\circ}\text{C}$.
- Supports wall mount and desktop mount.



Series Overview

Highly reliable, the unmanaged PoE switch is equipped with a high performance switching engine, has large buffer memory and optimizes transmission performance. The device supports long distance PoE, and the PoE port provides up to 30 W, making it suitable for small and medium sized settings that require PoE power supplies. It can operate in temperatures ranging -10°C to 55°C . It also features EMC and has protection against overvoltage, overcurrent, static electricity, lightning strikes, pulses and other types of interference.

Functions

Plug and Play

Hassle-free, it does not require any configuration. Simply use after it is powered on.

Easy Installation

Supports desktop, rack mounting and wall mounting, suitable for various scenarios.

Long Distance PoE

The transmission distance of a PoE port can be up to 250 m, meeting the requirement of wired transmission (bandwidth reduced to 10 Mbps).

Wide Operating Temperature

Supports working at ambient temperatures of -10°C to $+55^{\circ}\text{C}$, and has built-in professional lightning-proof circuits that effectively reduce the impact of thunderstorms on network systems and improve system robustness, allowing the device to adapt to harsh environments.

Scene

Suitable for scenes such as houses, factories and offices.

Desktop PoE Switch | DH-S3006-4ET-36

Technical Specification

Basic

| | |
|-------------------------------|---|
| Layer | Unmanaged |
| Switching Capacity | 1.2 Gbps |
| Packet Forwarding Rate | 0.893 Mpps |
| Description of Function Slots | Port 1-4: 4 × RJ-45 10/100 Mbps (PoE) Port 5-6: 2 × RJ-45 10/100 Mbps (Uplink) |
| Operating Temperature | -10 °C to +55 °C (+14 °F to +131 °F) |
| Operating Humidity | 10%–90% (RH), non-condensing |
| Storage Temperature | -40 °C to +75 °C (-40 °F to +167 °F) |
| Storage Humidity | 5%–95% (RH), non-condensing |
| Power Supply | External power supply: 53 V, 50/60 Hz, max 0.8 A |
| Power Consumption | Idling: 1.3 W Full load: 38.3 W |
| Statics Protection | Air discharge: 8 kV Contact discharge: 6 kV |
| Lightning Protection | Common mode: 6 kV Differential mode: 1 kV |
| Net Weight | 0.19 kg (0.42 lb) |
| Gross Weight | 0.635 kg (1.40 lb) |
| Product Dimensions | 115.5 mm × 84.3 mm × 27 mm (4.55" × 3.32" × 1.06") (L × W × H) |
| Packaging Dimensions | 196 mm × 115 mm × 85 mm (7.72" × 4.53" × 3.35") (L × W × H) |
| Casing Material | Sheet Metal |
| Installation | Desktop mount; wall mount |
| Certifications | CE |

PoE

| | |
|--------------------------------|----------------------------|
| PoE | Yes |
| PoE Power | Port 1-4≤30 W, total≤36 W |
| PoE Protocol | IEEE 802.3af; IEEE 802.3at |
| PoE Pin Assignment | 1,2,4,5 (V+),3,6,7,8 (V-) |
| Long Distance PoE Transmission | Yes |

Hardware

| | |
|------------|--|
| DIP Switch | Long Distance PoE: The transmission distance of ports 1–4 can reach up to 250 meters. The negotiation speed can be reduced to 10 Mbps. |
|------------|--|

Performance

| | |
|------------------------|--------------------------------------|
| Packet Buffer Size | 768 Kbit |
| Jumbo Frame | 2048 Byte |
| MAC Table Size | 2K |
| Communication Standard | IEEE 802.3; IEEE 802.3u; IEEE 802.3x |

General

| | |
|--------------|-----------------|
| Packing List | 1 × User Manual |
|--------------|-----------------|


Packing List

1 × Legal and Regulatory Information
1 × Power Cord
1 × Power Adapter


Ordering Information

| Type | Model | Description |
|------------|-----------------|---|
| PoE Switch | DH-S3006-4ET-36 | 6-Port Unmanaged Desktop Switch with 4-Port PoE |

Installation

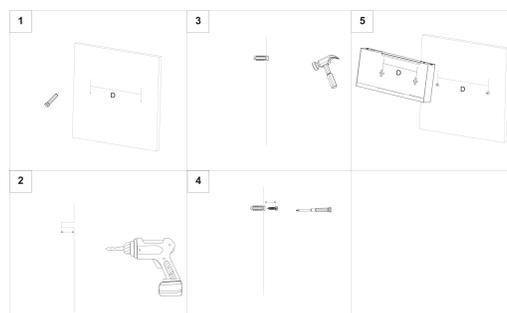

Dimensions (mm[inch])

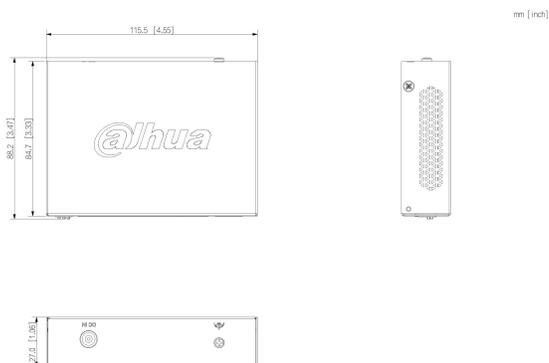

Panels

